

BONNET

BONNET GRANDE CUISINE



Registered office:

Rue des Frères Lumière - Z.I Mitry Compans
77292 MITRY MORY Cedex

OPTIMUM 700, Gas cooking unit, solid plates on free bay

P075504: Width 400

P075505: Width 800

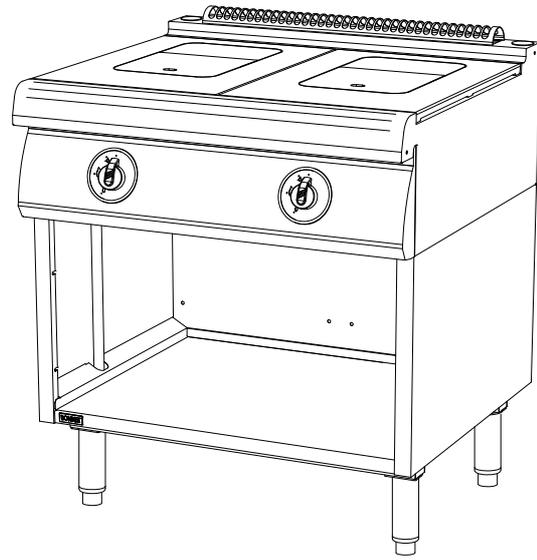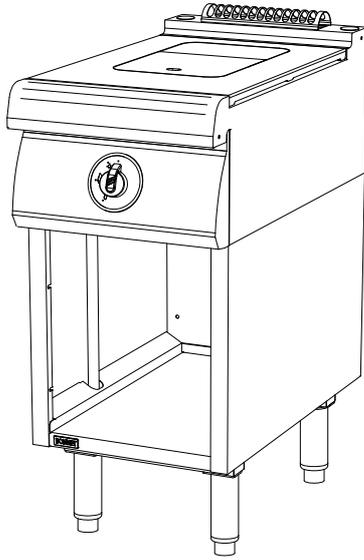

GENERALITIES

- * All stainless steel one-piece upper structure (20/10 thick top + 15/10 thick laser continuously welded added side panels) enabling a flush assembly.
- * All stainless steel construction designed to avoid any infiltration.
- * Unfailing sturdy equipment for direct wall fixation.
- * Crown front with 20/10 thick ends enabling almost flush assembly.
- * Grouped and built-in controls protected from shocks and spillage. Removable fascia with maintenance position.
- * Appliance delivered with 4 black reinforced fibre polyamide legs fitted with screw jacks.

SOLID PLATE

- * Solid cast-iron removable 10 mm thick plate, dimension 550 x 400, fitted with 2 removable inserts.
- * Insulated stainless steel combustion chamber forming a collecting receiver.
- * Heating ensured by a circular brass burner guaranteeing a quick temperature rise of the inserts.
- * Serially mounted safety thermocouple and pilot flame.
- * Gas tap control.

FREE BAY

- * A free bay compatible with the GN 1/1 tray set, stainless steel bottom fitted with anti-spillage upstands (width 400 or 800).

OPTIONS

- * Electric ignition for solid plate module through a front push-button.
- * Electric ventilated heating kit: controlled by a thermostat 30/85°C, equipped with a safety temperature limiter and an indicator.
- * A 200 mm high movable base, equipped with 4 stainless steel castors two of which with brake, replacing the fixed base (see the specific technical sheets).
- * Stands for masonry basement (see specific technical documentations).
- * A one-piece wall or central 30/10 thick top.

ACCESSORIES

- * Door kit for free bay: 1 door for width 400 mm with left or right hinges. A stainless steel lined door with a magnetic closure.
- * A storing rack kit for free bay: removable and hanging, 4 levels spaced by 60 mm, enabling the storage of the GN 1/1 tray set, or the use of plastic GN 1/1 trays as drawers. A pair of racks per 400 wide element.
- * Wall hanging kit.

STANDARDS: Compliance with standards

EN 203-1: European standard relating to the safety of gas appliances.




EN 203-2-9: European standard relating to the rational use of energy.

EN 60335-2-36 and EN 60335-2-49: European standards relating to the safety of electric appliances. (French standards: Classification index C 73-836 and C 73-849).



IP 25 and IK 9: Protection indexes.

XP U 60-010: Hygiene.

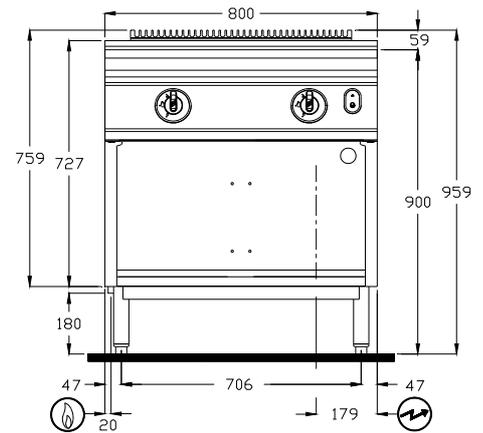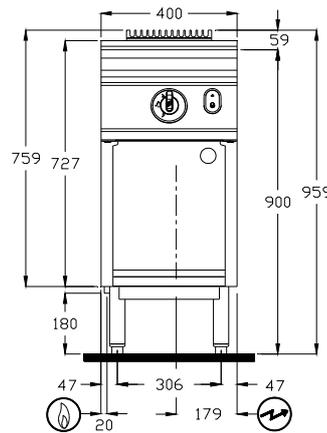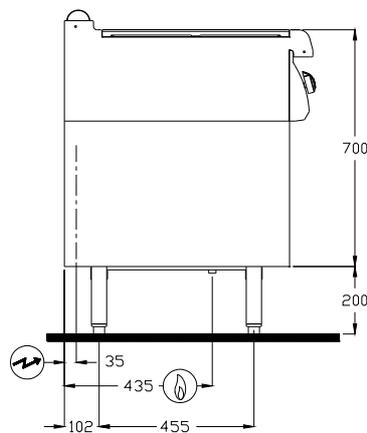

P075504
P075505


-  **GAS connection**
-  **ELECTRIC connection**
(Foresee a cable with 1.5 m free length)

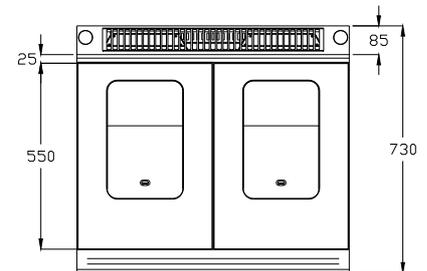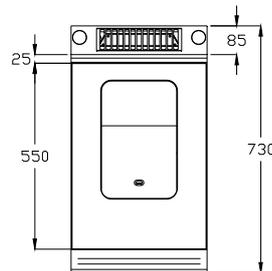

| MODEL | B-B706.CF400 | B-B706.CF800 |
|---|---|--------------|
| DIMENSIONS (mm) | | |
| Height | 959 | 959 |
| Width | 400 | 800 |
| Depth | 730 | 730 |
| Solid plate | 550 x 400 | 550 x 800 |
| PACKAGING (mm) | | |
| Height | 1150 | 1150 |
| Width | 500 | 900 |
| Depth | 830 | 830 |
| WEIGHT (KG) | 70 | 130 |
| COMPOSITION OF THE TOP | | |
| Solid plate 6.5 kW | 1 | 2 |
| COMPOSITION OF THE BOTTOM PART | | |
| Width of free bay | 400 | 800 |
|  GAS | | |
| Power (kW) | 6.5 | 13 |
| G31 Propane | 37 ^{±4} /50 ^{±5} mbar (kg/h) | 0.51 |
| G30 Butane | 50 ^{±5} mbar (kg/h) | 0.51 |
| G20 Natural gas | 20 ^{±2} mbar (m ³ /h) | 0.69 |
| G25 Natural gas | 20 ^{±2} /25 ^{±3} mbar (m ³ /h) | 0.78 |
| Power (kW) | 5.1 | 10.2 |
| G30 Butane | 28 ^{±3} /30 ^{±3} mbar (kg/h) | 0.40 |
|  ELECTRICITY (Single-phase 230V) | | |
| Optional electric ignition | 0.1 | 0.1 |
| Optional ventilated heating kit | 1 | 2 |
| GAS CONNECTION | | |
| Gas outlet at 180 mm above the ground (thread 15/21 mm) | | |
| As standard, the appliances are equipped with G 20/20 mbar (and G 25/25 mbar) or another gas on request. | | |
| ELECTRIC CONNECTION | | |
| Electric outlet at 615 mm above the floor | | |